



## USB UPDATE PROCESS


- Once your bootable USB drive has been created copy all the files associated with the firmware zip file onto your bootable USB drive.
- **Run the Firmware Update**
  1. Insert the bootable USB Flash Drive into your system and reboot your system.
  2. The system will bootable from the USB Flash Drive
  3. Note: If the system does not boot from the USB Flash Drive repeat the steps under **Check the Boot Order**
  3. When the system boots from the USB Flash Drive properly you will be given a C: prompt. Type **SSDCHK** then press enter
- You will see the screen referenced below.

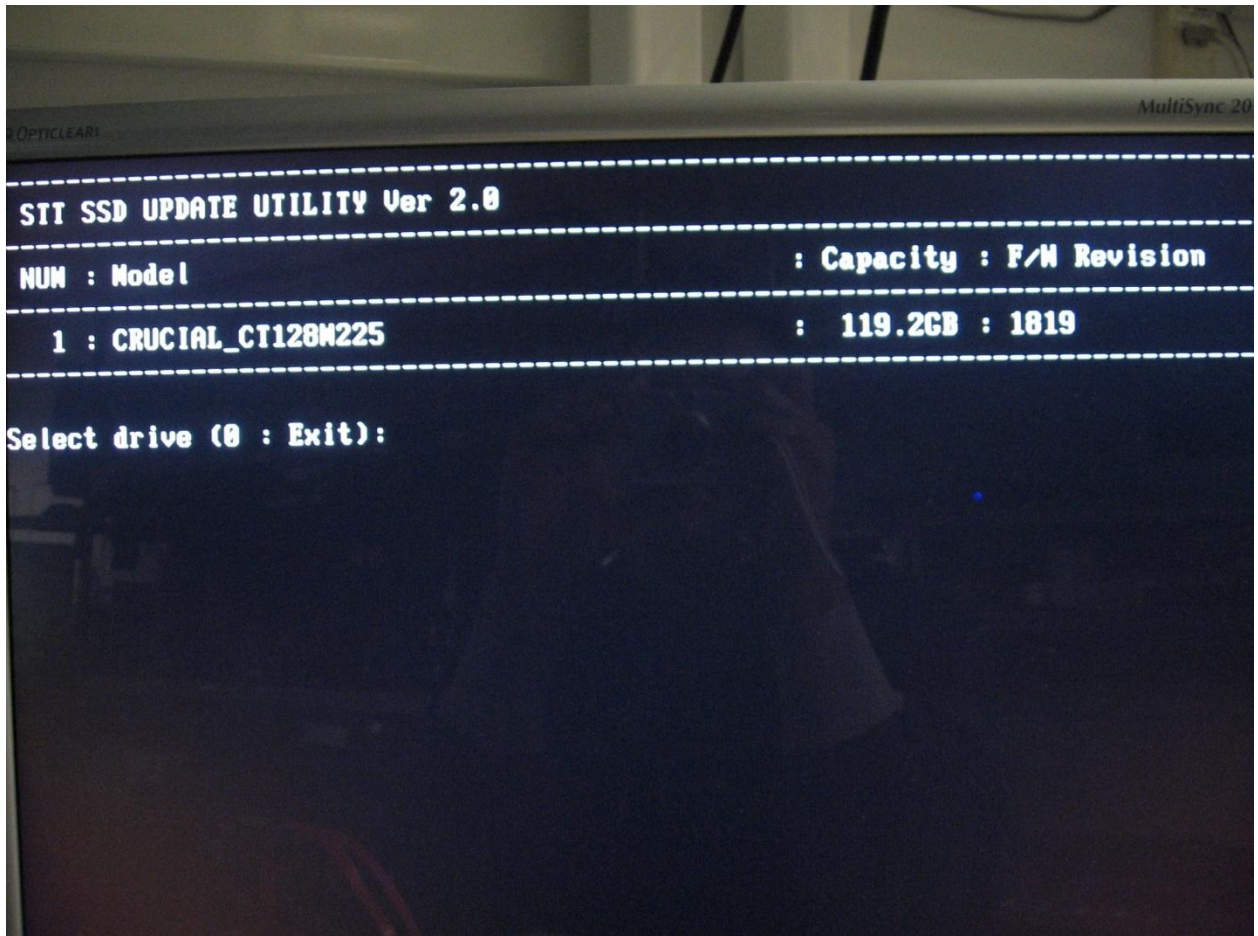

- Verify the New firmware model matches the model number of your Crucial Solid-State Drive
- Select the appropriate drive number (example : 1) then hit enter.
- **At the C prompt type updater and hit enter. (example below)**

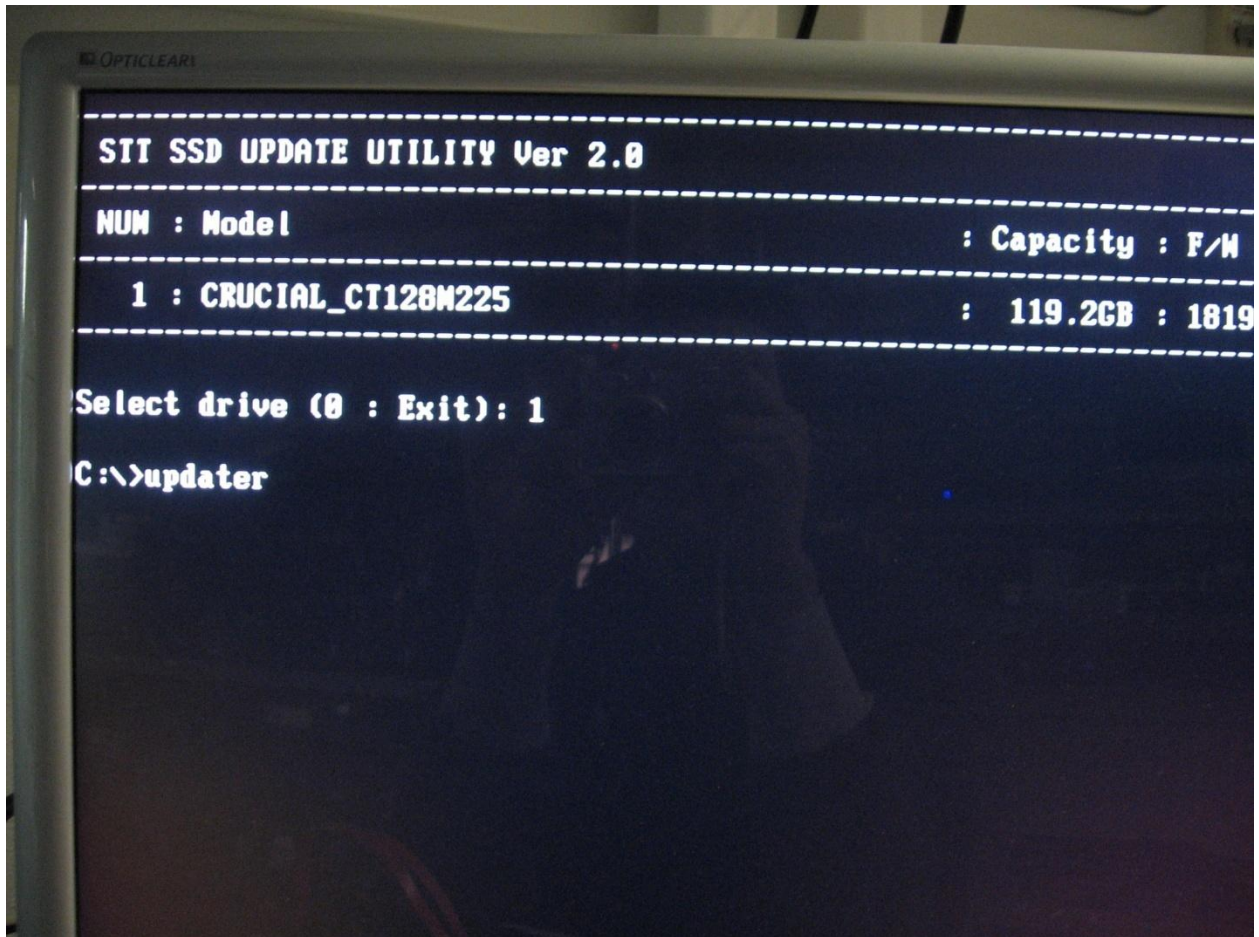

- Do you want to find target drive? Will come up, hit the Y key.
- The screen referenced below will come up.

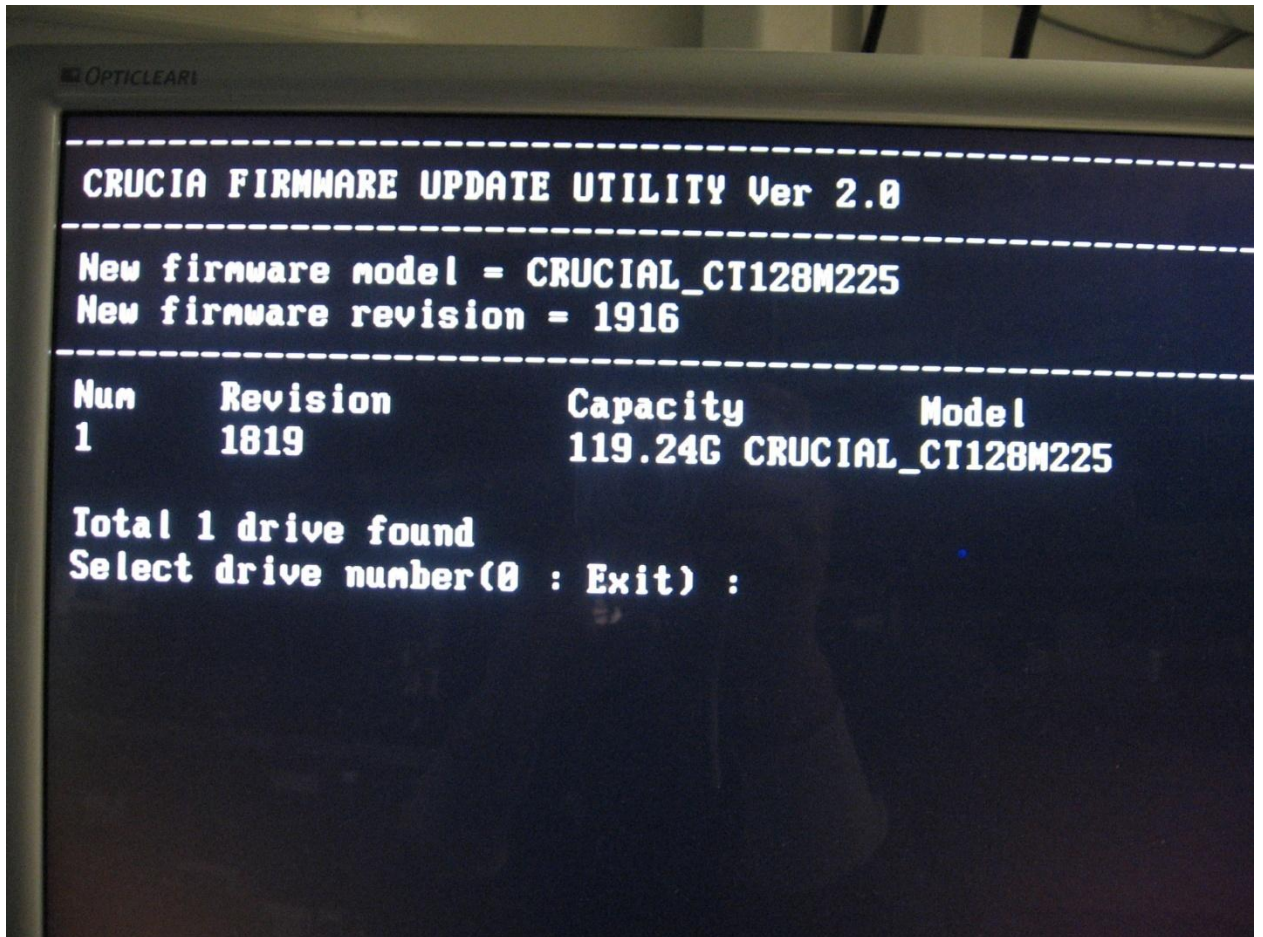

- Select the appropriate drive number for your configuration and press enter (example: 1)
- Your firmware has completed the update process. The screenshot referenced below will appear.

-----  
CRUCIAL FIRMWARE UPDATE UTILITY Ver 2.0  
-----

New firmware model = CRUCIAL\_CT256M225

New firmware revision = 1916  
-----

Nun	Revision	Capacity	Model
1	1819	238.47G	CRUCIAL_CT256M225

Total 1 drive found

Select drive number(0 : Exit) : 1

Firmware download successfully completed!

Remove CDROM or USB and reboot!  
-----

Bye!  
-----

Press any key to continue . . . \_